



# Super GLAND

## PLASTIC CABLE GLAND


Supplied complete with locknut

**IP68 Protection at 10 bar (145 psi)**

102 metres submersible




**A SUPERIOR GLAND THAT  
SEALS PERFECTLY WITH  
EXCELLENT CABLE GRIP**

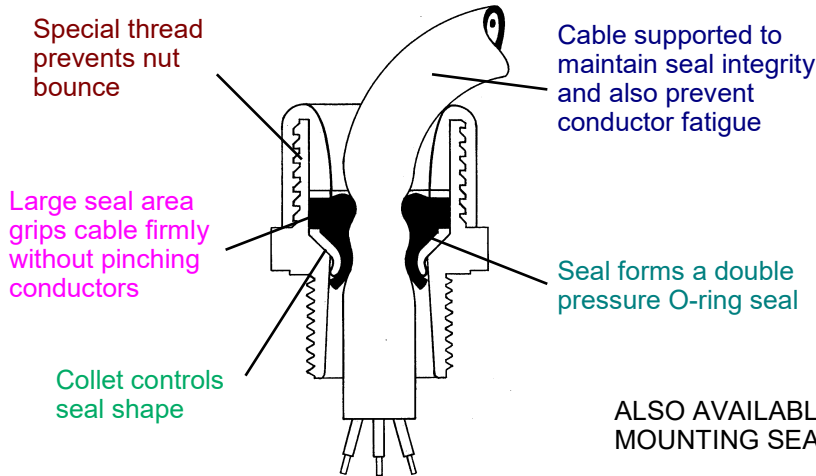

ALSO AVAILABLE WITH WAVE SEAL™ IP 68 SURFACE MOUNTING SEALING WASHER

Patented Internationally

### TECHNICAL DATA

Cat No.	Thread size	Thread length		Cable Range OD	Pack size
GMIL12	M12 x 1.5	10	16	2.5 - 6	50
GMIL16	M16 x 1.5	15	22	4.5 - 9	50
GMIL20	M20 x 1.5	15	27	7.5 - 13.2	50
GMIL25	M25 x 1.5	15	32	13 - 18	25
GMIL32	M32 x 1.5	15	46	17.5 - 25	20

**Material:** Nylon

**Colour:** Black or Grey

**Working temp:** -40°C to 100°C  
Short term 130°C

**UV Stabilisation:** Suitable for outdoor use with respect to exposure to Ultraviolet Light, Water Exposure and Immersion in accordance with UL 746C

**Chemical resistance:** Excellent resistance to oils, petrol, alcohols, seawater, caustic soda, weak acids, alkalis, bases and salts.



A product designed and distributed by

**McCABE INDUSTRIES LTD**

667C High Street, Lower Hutt 5010, New Zealand  
Ph: 045289619; Email: info@mccabeindustries.co.nz  
www.mccabeindustries.co.nz